




BASSALER
FOURNITURES INDUSTRIELLES

CHAINES
ET PIGNONS

Guide Chaines

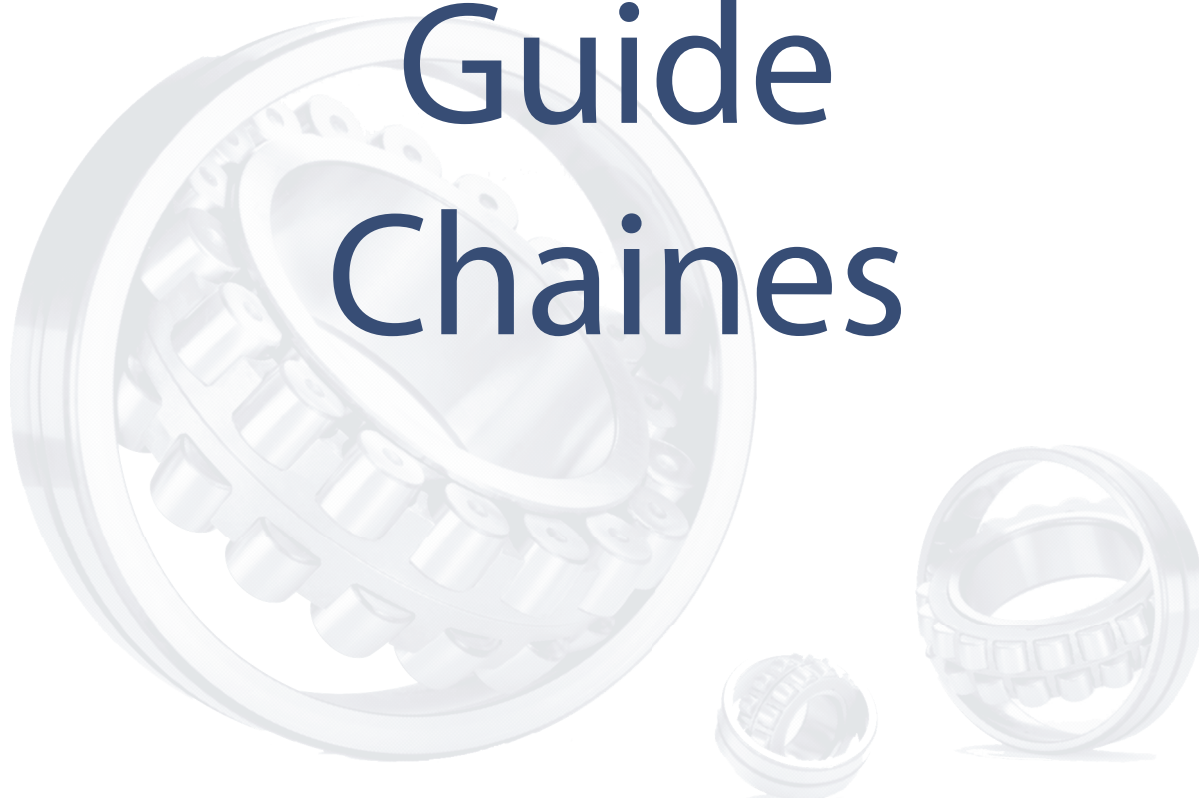


GUIDE-CHAÎNES

Les guides chaînes et rails sont livrés en longueur de 2 mètres. Possibilité de réalisation de longueurs spéciales sur demande.


MS

Référence	ISO	Pas	W	H	A	h	Kg/m	
MS-1	06B-1	9.525	15	10	5.4	1.5	0.135	
MS-2	08B-1	12.7	20	10	7.4	2.2	0.165	
MS-215	08B-1	12.7	20	15	7.4	2.2	0.260	
MS-220	08B-1	12.7	20	20	7.4	2.2	0.350	
MS-3	10B-1	15.875	20	10	9.2	2.6	0.160	
MS-315	10B-1	15.875	20	15	9.2	2.6	0.260	
MS-320	10B-1	15.875	20	20	9.2	2.6	0.350	
MS-4	12B-1	19.05	25	10	11.3	2.4	0.210	
MS-415	12B-1	19.05	25	15	11.3	2.4	0.325	
MS-420	12B-1	19.05	25	20	11.3	2.4	0.440	
MS-5	16B-1	25.4	40	15	16.5	3.5	0.470	
MS-520	16B-1	25.4	40	20	16.5	3.5	0.660	
MS-6	20B-1	31.75	45	15	19	4.3	0.530	
MS-620	20B-1	31.75	45	20	19	4.3	0.720	
MS-7	24B-1	38.1	60	15	24.6	5.6	0.785	
MS-8	28B-1	44.45	75	20	30	6.9	1.130	
MS-9	32B-1	50.8	85	20	30	7.8	1.210	

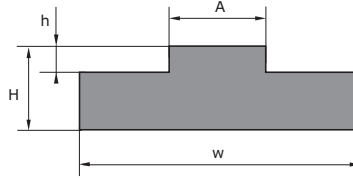



MD

Référence	ISO	Pas	W	H	A	h	B	KG
MD-1	06B-2	9.525	25	10	5.4	1.5	16	0.230
MD-2	08B-2	12.7	35	10	7.4	2.2	21	0.306
MD-215	08B-2	12.7	35	15	7.4	2.2	21	0.530
MD-3	10B-2	15.875	40	10	9.2	2.6	26	0.344
MD-315	10B-2	15.875	40	15	9.2	2.6	26	0.524
MD-4	12B-2	19.05	45	10	11.3	2.4	31	0.396
MD-415	12B-2	19.05	45	15	11.3	2.4	31	0.598
MD-5	16B-2	25.4	65	15	16.5	3.5	48	0.863
MD-520	16B-2	25.4	65	20	16.5	3.5	48	1.156
MD-6	20B-2	31.75	70	15	19	4.3	54.5	0.912
MD-620	20B-2	31.75	70	20	19	4.3	54.5	1.232
MD-7	24B-2	38.1	88	20	24.6	5.6	72	1.499
MD-8	28B-2	44.45	105	20	30	6.9	89	1.790
MD-9	32B-2	50.8	105	20	30	7.8	89	1.750



MT


Référence	ISO	Pas	W	H	A	h	B	KG
MT-1	06B-3	9.525	35	10	5.4	1.5	25.9	0.306
MT-2	08B-3	12.7	45	10	7.4	2.2	35.3	0.381
MT-215	08B-3	12.7	45	15	7.4	2.2	35.3	0.595
MT-220	08B-3	12.7	45	20	7.4	2.2	35.3	0.808
MT-3	10B-3	15.875	55	10	9.2	2.6	42.5	0.455
MT-4	12B-3	19.05	65	10	11.3	2.4	50.3	0.546
MT-5	16B-3	25.4	95	15	16.5	3.5	80.3	1.167
MT-6	20B-3	31.75	106	15	19	4.3	92.0	1.304
MT-7	24B-3	38.1	136	20	24.6	5.6	121.5	2.247
MT-8	28B-3	44.45	165	25	30	6.9	149.3	3.522
MT-9	32B-3	50.8	165	30	30	7.8	149.3	4.262




MU & MUCG

Référence	ISO	PAS	W	H	C	h	J	D	K	KG
MU-1	06B-1	9.525	20	15	9.2	4.2	2.8	4		0.257
MU-2	08B-1	12.7	25	15	12.7	4.8	3.5	5		0.308
MU-3	10B-1	15.875	25	15	15.2	5.1	3.6	6		0.296
MU-4	12B-1	19.05	25	20	16.7	5.7	3.9	7		0.403
MU-5	16B-1	25.4	35	25	24.4	10	8.4	9		0.624
MUCG-1	06B-1	9.525	20	10	9.2	4.2	2.8	4	15	0.720
MUCG-2	08B-1	12.7	25	15	12.7	4.8	3.5	5	22	1.140
MUCG-3	10B-1	15.875	25	15	15.2	5.1	3.6	6	22	1.130
MUCG-4	12B-1	19.05	25	20	16.7	5.7	3.9	7	27	1.270
MUCG-5	16B-1	25.4	35	25	24.4	10	8.4	9	33	2.030

MU

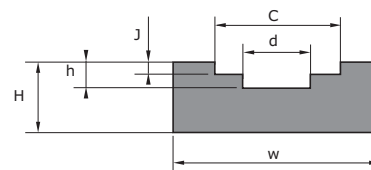

MUCG

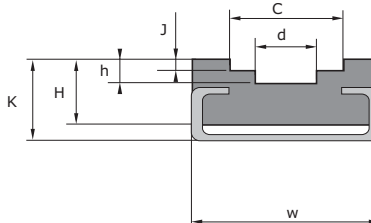


GUIDE-CHAÎNES

Les guides chaînes et rails sont livrés en longueur de 2 mètres. Possibilité de réalisation de longueurs spéciales sur demande.



MTCG

Référence	ISO	Pas	W	H	K	h	A	Profil	Kg/m
MTCG-1	06B-1	9.525	20	15	17	1.5	5.4	C2010	0.620
MTCG-2	08B-1	12.7	20	15	17	2.2	7.4	C2010	0.695
MTCG-3	10B-1	15.875	20	15	17	2.6	9.2	C2010	0.700
MTCG-4	12B-1	19.05	28	15	18	2.4	11.3	C2812	1.170
MTCG-4	12B-1	19.05	20	15	17	2.4	11.3	C2010	0.830
MTCG-5	16B-1	25.4	28	15	24	3.5	16.5	C2812	2.245
MTCG-6	20B-1	31.75	38	25	30	4.3	19	C3818	2.305
MTCG-7	24B-1	38.1	38	25	30	5.6	24.6	C3818	2.390
MTCG-8	28B-1	44.45	38	25	30	6.9	30	C3818	2.410
MTCG-9	32B-1	50.8	38	25	30	7.8	30	C3818	2.480





MUC & MUCD

Référence	ISO	Pas	W	H	L	h	A	S	B	Kg/m
MUC-1	06B-1	9.525	25	10	15	1.5	5.4	4.4		0.170
MUC-2	08B-1	12.7	30	15	20	2.2	7.4	7.2		0.275
MUC-3	10B-1	15.875	33	20	23	2.6	9.2	9.5		0.405
MUC-4	12B-1	19.05	38	20	28	2.4	11.3	11.1		0.410
MUC-5	16B-1	25.4	51	25	41	3.5	16.5	16.5		0.510
MUCD-1	06B-2	9.525	36	15	26	1.5	5.4	4.4	16	0.390
MUCD-2	08B-2	12.7	45	20	35	2.2	7.4	7.2	21	0.620
MUCD-3	10B-2	15.875	50	25	40	2.6	9.2	9.5	26	0.816
MUCD-4	12B-2	19.05	56	25	46	2.4	11.3	11.1	31	0.810
MUCD-5	16B-2	25.4	85	30	75	3.5	16.5	16.5	48	1.200

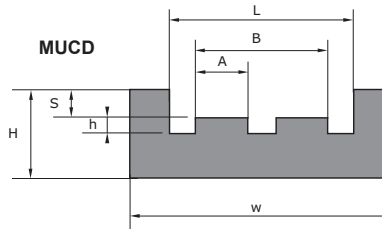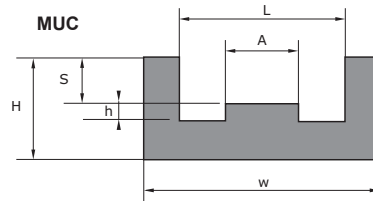


MGH & MGHCG

Référence	ISO	Pas	W	H	C	h	I	d	J	Profil	Kg/m
MGH-1	06B-1	9.525	20	25	9.3	10	5.6	4	8.7		0.414
MGH-2	08B-1	12.7	24	30	12.8	12.7	7.6	5	11.5		0.564
MGH-3	10B-1	15.875	30	35	15.4	14.8	9.5	6	13.5		0.832
MGH-4	12B-1	19.05	40	35	16.9	17.5	11.5	7	15.9		1.106
MGH-5	16B-1	25.4	40	45	24.4	26.8	16.9	9	25.7		1.231
MGH-6	20B-1	31.75	50	50	27.5	31.2	19.4	11	29.3		1.726
MGH-7	24B-1	38.1	60	60	36.5	40.1	25.2	16	38.2		2.332
MGH-8	28B-1	44.45	70	70	41.5	48.9	30.8	17	46.9		3.173
MGH-9	32B-1	50.8	75	75	44.5	53	30.8	19	47.3		3.264
MGHCG-1	06B-1	9.525	30	24			5.6			C3024	2.150
MGHCG-2	08B-1	12.7	30	24			7.6			C3024	2.150
MGHCG-2E	08B-1	12.7	28	16			7.6			C2816	2.100
MGHCG-3	10B-1	15.875	30	24			9.3			C3024	2.100
MGHCG-4	12B-1	19.05	30	24			11.5			C3024	2.060
MGHCG-5	16B-1	25.4	45	40			15.5			C4540	2.060





MUCCG

Référence	ISO	Pas	W	H	K	L	h	A	S	Profil	Kg/m
MUCCG-1	06B-1	9.525	25	15	18	15	1.5	5.4	4.4	C2010	0.760
MUCCG-2	08B-1	12.7	30	25	27	20	2.2	7.4	7.2	C2812	1.100
MUCCG-3	10B-1	15.875	33	30	32	23	2.6	9.2	9.5	C2812	1.305
MUCCG-4	12B-1	19.05	38	35	50	28	2.4	11.3	11.1	C3818	2.335
MUCCG-5	16B-1	25.4	51	40	55	41	3.5	16.5	16.5	C3818	2.440



MTCGD

Référence	ISO	Pas	W	H	K	h	A	Profil	Kg/m
MTCGD-1	06B-1	9.525	15.5	10	12	1.5	5.4	C2010	0.615
MTCGD-2	08B-1	12.7	21.5	10	12	2.2	7.4	C2010	0.715
MTCGD-3	10B-1	15.875	26	15	17	2.6	9.2	C2812	1.165
MTCGD-4	12B-1	19.05	30.7	15	18	2.4	11.3	C2812	1.200
MTCGD-5	16B-1	25.4	48	20	27	3.5	16.5	C3818	1.170
MTCGD-6	20B-1	31.75	55	25	30	4.3	19	C3818	2.480
MTCGD-7	24B-1	38.1	72	30	35	5.5	24.7	C3818	3.020




GUIDE-CHAÎNES

Les guides chaînes et rails sont livrés en longueur de 2 mètres. Possibilité de réalisation de longueurs spéciales sur demande.


MGHLCG

Référence	ISO	Pas	W	H	K	I	J	h	d	D	C	Profil	Kg/m
MGHLCG-1	06B-1	9.525	20	17.5	21	5.6	8.7	9.9	4	6.6	9.3	C2010	0.622
MGHLCG-2	08B-1	12.7	28	27.5	32	7.6	11.5	12.7	5	8.7	12.8	C2812	1.450
MGHLCG-3	10B-1	15.875	28	27.5	32	9.3	13.5	14.8	6	10.4	15.4	C2812	1.402
MGHLCG-4	12B-1	19.05	38	34	43	11.5	15.9	17.5	7	12.3	16.9	C3818	1.709
MGHLCG-5	16B-1	25.4	38	40	50	16.9	25.7	26.8	9	16.1	24.4	C3818	1.600
MGHLCG-6	20B-1	31.75	60	45	55	19.4	29.3	31.2	11	19.3	27.5	C6020	4.800
MGHLCG-7	24B-1	38.1	60	55	65	25.2	38.2	40.1	16	25.7	36.5	C6020	5.000
MGHLCG-8	28B-1	44.45	70	70	80	30.8	46.9	48.9	17	28.3	41.5	C6020	6.200
MGHLCG-9	32B-1	50.8	70	70	80	30.8	47.3	53	19	29.6	44.5	C6020	6.200




MGHPCG

Référence	ISO	Pas	H	W	L	I	J	h	d	D	Profil	Kg/m
MGHPCG-1	06B-1	9.525	25	31	53	5.6	8.7	9.9	4	6.6	C15	2.340
MGHPCG-2	08B-1	12.7	25	31	53	7.6	11.5	12.7	5	8.7	C15	2.300
MGHPCG-3	10B-1	15.875	25	31	53	9.3	13.5	14.8	6	10.4	C15	2.250
MGHPCG-4	12B-1	19.05	25	31	53	11.5	15.9	17.5	7	12.3	C15	2.250

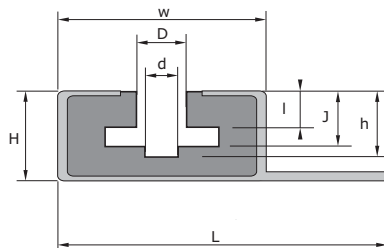


MGHGC

Référence	ISO	Pas	H	W	L	I	J	h	d	D	Profil	Kg/m
MGHGC-1	06B-1	9.525	25	31	47	5.6	8.7	9.9	4	6.6	C14	2.150
MGHGC-2	08B-1	12.7	25	31	47	7.6	11.5	12.7	5	8.7	C14	2.150
MGHGC-3	10B-1	15.875	25	31	47	9.3	13.5	14.8	6	10.4	C14	2.100
MGHGC-4	12B-1	19.05	25	31	47	11.5	15.9	17.5	7	12.3	C14	2.060

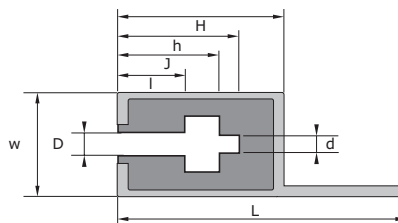



M2PCG

Référence	ISO	Pas	W	H1	H2	A	K	H	Profil	Kg/m
M2PCG-1	06B-1	9.525	20	31.6	19.05	14.5	28.4	26.4	C2010	0.900
M2PCG-2	08B-1	12.7	20	34.8	18.9	16.5	30.5	28	C2010	0.960
M2PCG-3	10B-1	15.875	20	41.1	21.2	15.5	36	34.4	C2010	1.120
M2PCG-4	12B-1	19.05	28	47.5	24.8	18.6	41.5	38.5	C2812	1.700
M2PCG-5	16B-1	25.4	38	69.4	45.1	25	61.4	52.4	C3812	3.100

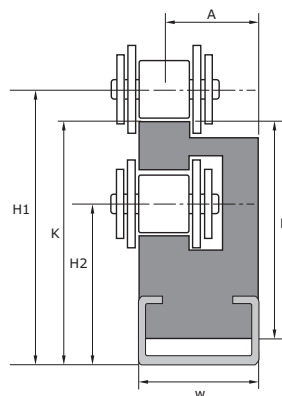

MHCG


Référence	W	K	H	h	Profil	Kg/m
MHCG-2006	20	6	5	0.8	C2405	0.350
MHCG-2011	20	11	10	5.8	C2405	0.450
MHCG-2014	20	14	10	4	C2010	0.790
MHCG-2017	20	17	15	7	C2010	0.880
MHCG-2022	20	22	20	12	C2010	0.940
MHCG-2815	28	15	10	3	C2812	1.180
MHCG-2818	28	18	15	6	C2812	1.320
MHCG-2824	28	24	20	12	C2812	1.488
MHCG-3822	38	22	12	4	C3818	2.200
MHCG-3824	38	24	15	6	C3818	2.460
MHCG-3830	38	30	20	12	C3818	2.690
MHCG-6030	60	30	20	10	C6020	3.260




GR

Références	H (mm)	20	25	30	35	40	45	50	60	70	80	90	100
GR..X2	2	0.86	1.12	1.33	1.59	1.77	2.02	2.20	2.63	3.10	3.53	3.96	4.39
GR..X3	3	1.33	1.64	2.02	2.28	2.63	3.01	3.31	3.96	4.65	5.30	5.98	6.59
GR..X5	5	2.20	2.76	3.31	3.87	4.39	4.99	5.51	6.59	7.71	8.78	9.90	10.98

.. = W



PROFILS / RAILS

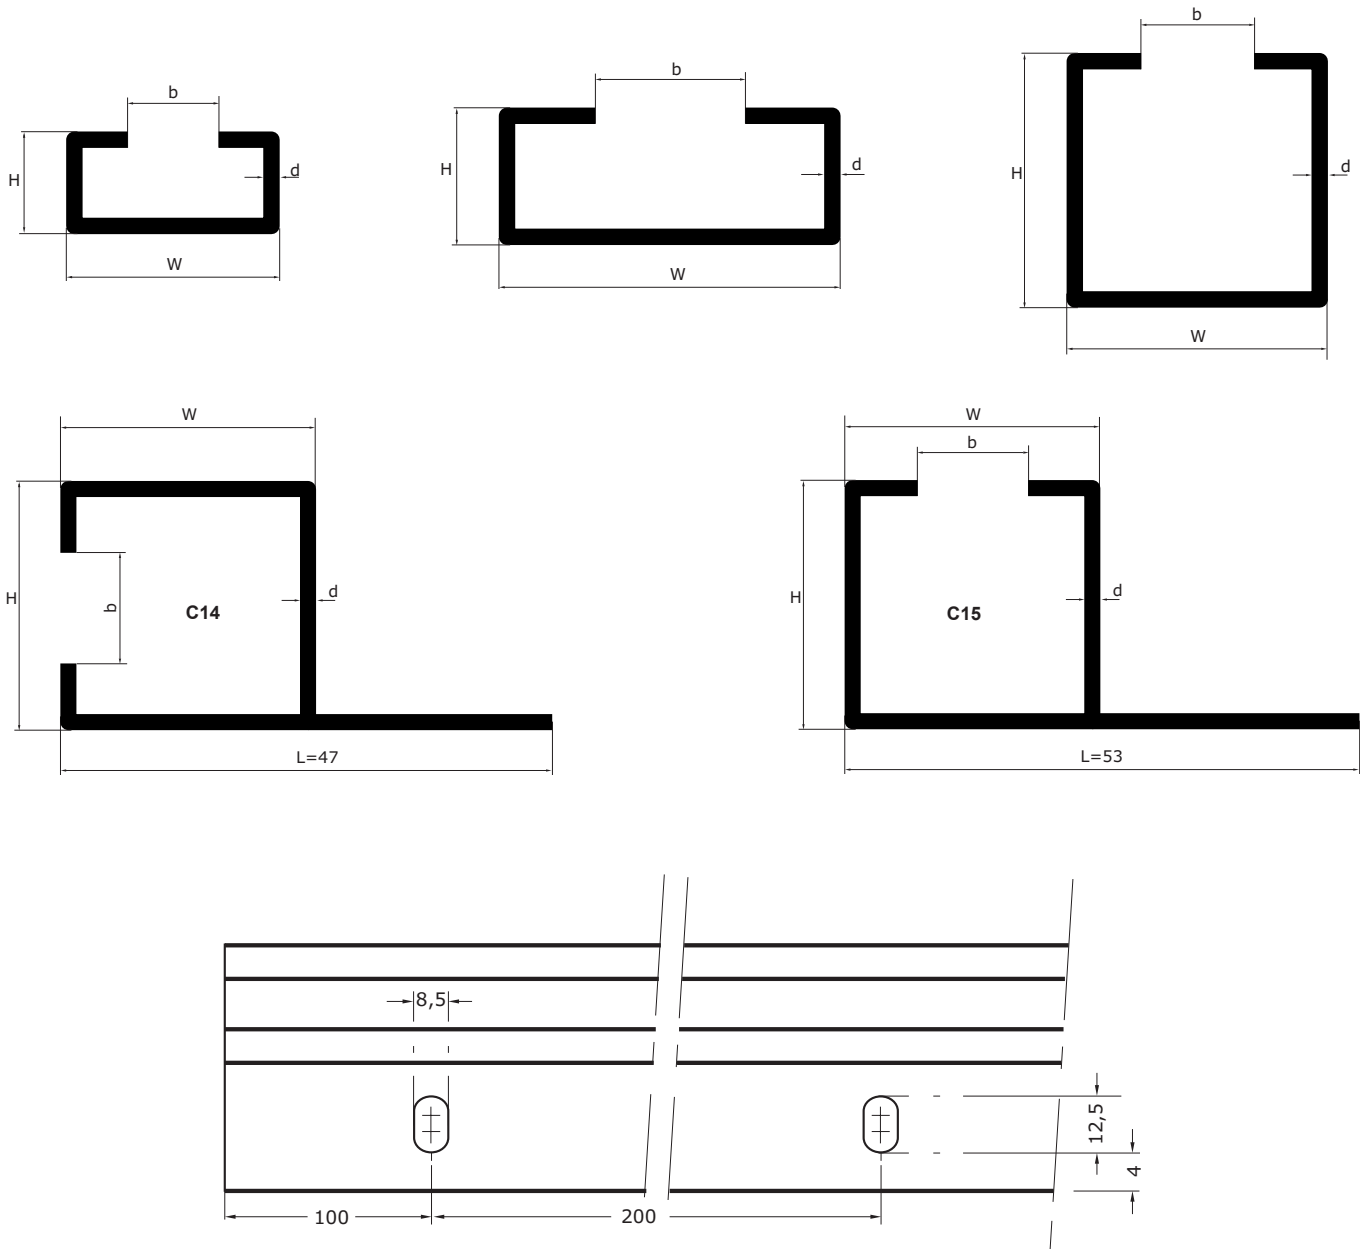

Poinçonnage du rail de fixation du profil C14 et C15.

Référence		W	H	b	d	Kg/m
GALVA	INOX					
C2405	C2405IN	24	5.2	17.5	1	0.28
C2010	C2010IN	20	10	10.0	1 / 1,5	0.43
C2812	C2812IN	28	12	14.0	2.2	0.95
C2816	C2816IN	28	16	14.0	2.3	1.15
C3818	C3818IN	38	18	22.0	1.5	0.98
C3024	C3024IN	30	24	20.0	1.5	0.94
C3818	C3818IN	38	18	22.0	2.5	1,43
C4540	C4540IN	45	40	31.0	2	2.05
C6020	C6020IN	60	20	36.0	2.5	2.16
C2815	C2815IN	28	15	12.0	2.3	1.15
C-14	C47IN / 31 / 25	31	25	20.0	2	1.20
C-15	C53IN / 31 / 25	31	25	20.0	2	1.20